

August 5, 2002

TA -1088/PT FIELD TELEPHONE

Operating instructions V 9.2 MIL SPEC O11026



Peryphon Ltd. wishes to thank you for joining the many customers who enjoy the use of this electronic field telephone.
This telephone is planned to resist extreme temperature and is fully waterproof.

CHARACTERISTICS

This telephone is designed and manufactured under strict quality standards to ensure many years of proper and efficient service.
The telephone enables connection between several telephones, (point to point) **LB** and ring between telephones, by pressing the ringing button (signaling).
The telephone also allows direct connection to a telephone line (**PSTN**) on position **CB**, and allows tone dialing, last-number redial, and fast-recall memory where 10 numbers can be stored.

INSTALLING

Open the battery housing by loosening the upper screw and insert 3 alkaline “C” batteries, according to the polarity (see polarity sign on the housing lid).
The batteries operate on position “L B” and C B”.



When replacing used batteries, all 3 must be replaced together. They must be from the same manufacturer and same batch.
Connect the telephone line, select the telephone operation desired by setting the **CB-LB** selector switch.


TELEPHONE OPERATION ON POSITION “LB”

Lift the handset, press the ringer button (signaling), the green LED will show that the ring is sent to the telephone connected at the end of the point to point line. Pressing the handset button (PTT) activates the microphone and allows conversation with the person on the other end of the line.

In an incoming call, the ringer will be heard and the incoming call LED will glow for a period of 20 seconds.

If battery voltage is decreasing on **LB** position, the “**Low Battery**” LED will glow.

The Ring volume can be adjusted by the volume selector button.
Replacing the handset when phone is not in use saves battery power.

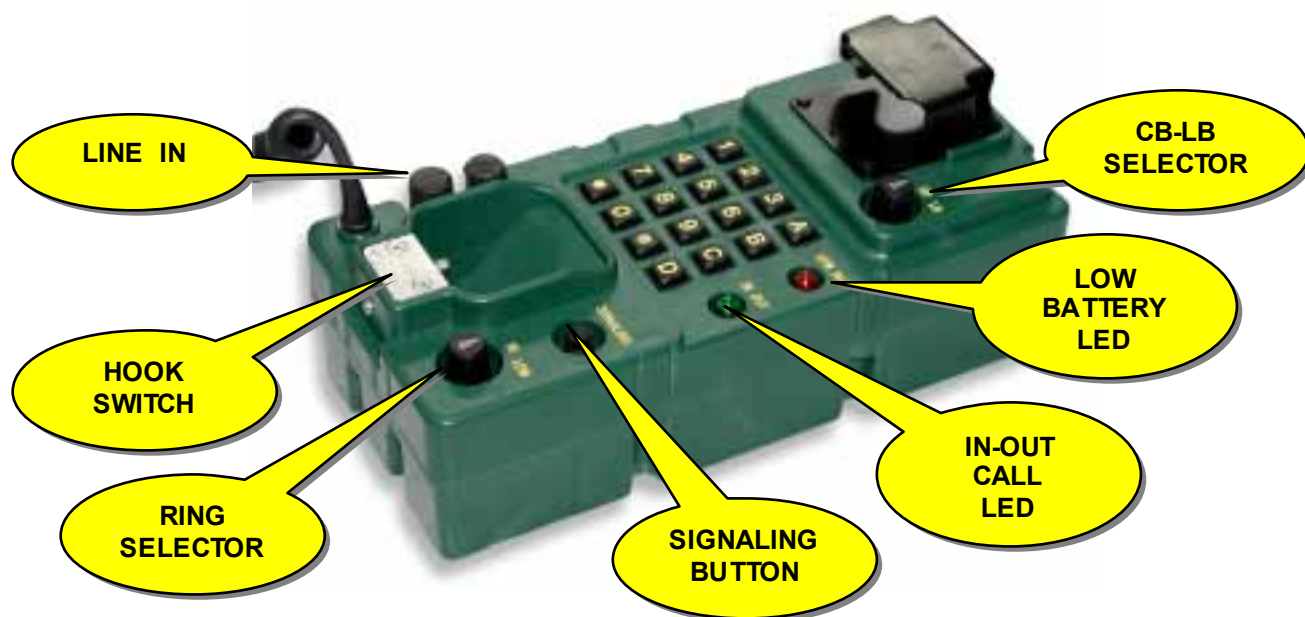



TELEPHONE OPERATION ON POSITION “CB”

Telephone connection on **CB** position allows Tone dialing. The keyboard allows dialing, redialing of the last number, Flash, quick dialing from the memory, and programming of 10 telephone numbers. To communicate, pressing the handset button (PTT) activates the microphone and allows conversation with the person on the other end of the line.

LAST NUMBER REDIAL

- 1) Lift the handset.
- 2) Press button  for last number redial.


FLASH

- 1) Lift the handset
 - 2) Press button  for Flash.
- By pressing shortly the  button, the line will be disconnected (**Flash**) for 100 msec.

MEMORY

10 Telephone number storing

You can store up to 10 telephone numbers.
Instructions on how to store a number:

- 1) Lift the handset
- 2) Dial the number you request
- 3) Press the  button twice
- 4) Press the location number (0-9) you would like it to be stored in
- 5) Hang up the phone.

It is recommended to print out a list of the numbers in the memory and keep it at hand or paste it on side of phone.

NOTE: For reasons of military security, if you wish to erase the numbers in memory, open battery compartment and take out batteries for 5 minutes.

DIALLING FROM MEMORY:

1. Lift the handset
2. Press the  button and the location (0-9)