


MAGNETO TA-1099 TELEPHONE

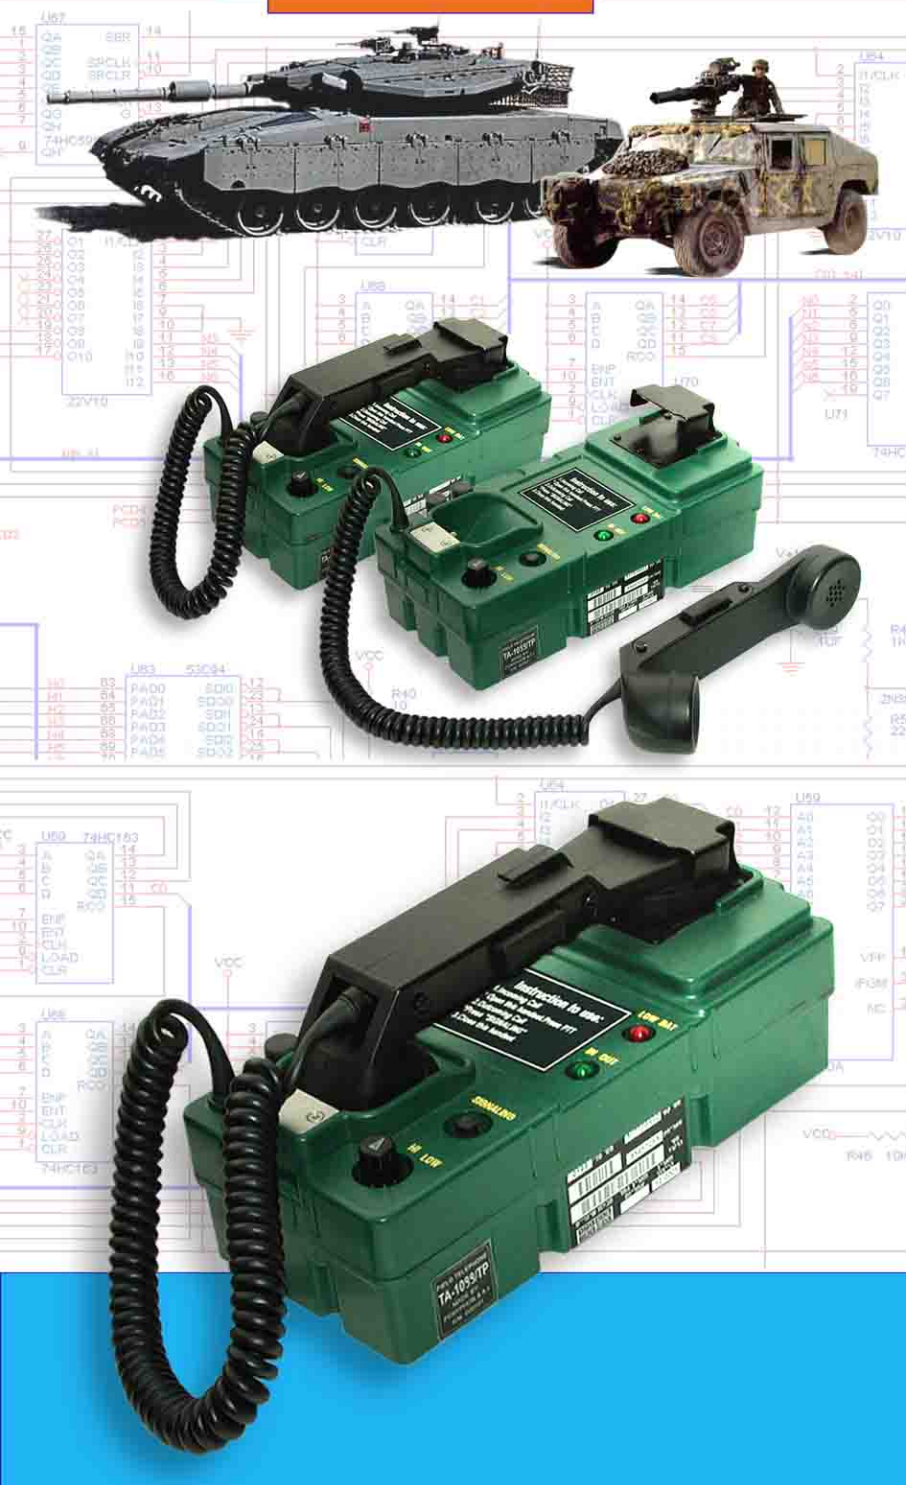

TA-1099

FIELD ELECTRONIC MAGNETO TELEPHONE

The **TA-1099** MAGNETO Telephone is a neatly styled. Light weight.

Technical Characteristics:

Voltage requirements:

3.3 to 4.5 V dc, 20 to 60 mA.

Frequency range: 300-3400 Hz.

Signaling Electronic Generator:

25 or 50 Hz 45 to 80 V RMS 3W.

Station-to-Station range: WD-1Up to 60 Km.

Warning LED for "Low Battery".

LED Indicator, holding ring for 20 seconds, and outgoing warning ring.

Push button Electronic Signaling Generator.

Piezo Ringer, adjustable.

Handset: H-189 with PTT switch.

Weight: Approx. 1.5 Kg excluding batteries.

Size: 240 x 95 x 110 mm.

Operation temp. -30 to +60 C.

Ring back LED.

4.5 V from standard "C" size cells.

10 Hamelacha St. Block 209
New Industrial park
Rosh-Hayin 48091, Israel
P.O.Box 13204 Tel-Aviv 61131
Fax: 972 3 9025684
Tel: 972 3 9025682
E-mail: peryphon@zahav.net.il
www.peryphon.co.il