



Prepaid Barcode Card Public Telephone IP -510JP Manual



Approved by Japan Association Telecommunication Equipment (J A T E)
PRIMUS Telecommunication K.K. Fax: +81-3-5846-3749 Phone: +81-3-5846-3761
www.iprimus.net

Dear customer

2

We are greeting you for buying our Prepaid Barcode Card Telephone IP 510JP and wish you success and enjoyment in using it.

The phone is designed for the Israeli market according to the Ministry of Communications specifications.

The telephone is planned for easy operation by the client without any need of special explanation, just look on the instructions displayed on the front of the phone and follow them.

We're sure that this telephone will be a good replacement to the existing system, using regular phone and random collection.

The system of paying by prepaid card allows the customer to dial abroad at a low rate by the international services.

In order to have the most advantages of the Prepaid Barcode Card Telephone IP 510JP, please read the instructions of the installation and operation.

For any problem, you can get support if needed, by calling the marketing representative.



Reliability of the product:

The Prepaid Barcode Card Telephone IP 510JP is designed to be used as a medium connected to the country's communication system. The manufacturer won't be responsible for any damage caused because of non proper use of this manual.

Humidity and dust:

Prevent using the Prepaid Barcode Card Telephone IP 510JP in special humid and dusty places, if not, some components may be damaged.

Keep away the phone from water source:

Keep away the phone from any place near any water source like: sinks, toilets, taps etc.

WARNING: The telephone may be damaged.

Selecting place to install the phone:

Put the telephone vertically, (straight).

By request of the Ministry of Communications, the phone has to be installed in a safe place, and in a range of the owner's sight where the phone is installed. Name of the owner, operating instructions should be close to the phone in a place easy to read.

Comments:

1. If the owner wishes to disconnect the Prepaid Barcode Card Telephone IP 510JP from the phone line, he has to remove the battery first.
2. The equipment won't work on 1+1 line. You can connect the Prepaid Barcode Card Telephone IP 510JP to the new 1+1 digital line.
3. When sign of low battery will appear, you must replace the battery to new ones Alkaline 9V battery. Estimated operation time – one year.
4. There will be no refund for prepaid cards.
5. Expiring date of the card is printed on it.

Taking out the phone from package 4

It is recommended to install the Prepaid Barcode Card Telephone IP 510JP in a room where there is supervision, and there is people, this to reduce the chance of theft or damages to the phone.

Suggestions:

Suitable	Not suitable
<ul style="list-style-type: none">• Easy access	<ul style="list-style-type: none">• Near toilets
<ul style="list-style-type: none">• Place easy to locate the phone	<ul style="list-style-type: none">• Isolated place without supervision
<ul style="list-style-type: none">• Capacious surface where the phone will be installed	<ul style="list-style-type: none">• Near emergency exit
<ul style="list-style-type: none">• Place with signs	
<ul style="list-style-type: none">• Lighted place	

The package contains:

- Prepaid Barcode Card Telephone IP 510JP
- Warranty document
- Manual for user
- 2 keys for the phone

Installation:

1. Bore 2 wholes in diameter of 7mm according to the place of the screws in the back of the phone and at a height of 1.1 Meters from the floor.
Put the phone in a shaded place not near a water source.
2. Connect Alkaline 9V battery. (Located on to PSB)
3. Connect the telephone to the country's phone network, connect the Prepaid Barcode Card Telephone IP 510JP to the line socket in the wall.
4. Lift the Handset.
5. The display will show:


Swipe The Card

6. Estimated battery life is one year, if the battery is empty, the display will show a message to the customer.

International dialing

General:

The Prepaid Barcode Card Telephone IP 510JP is a phone operated by prepaid cards. The user has to operate according to the recorded and displayed instructions.

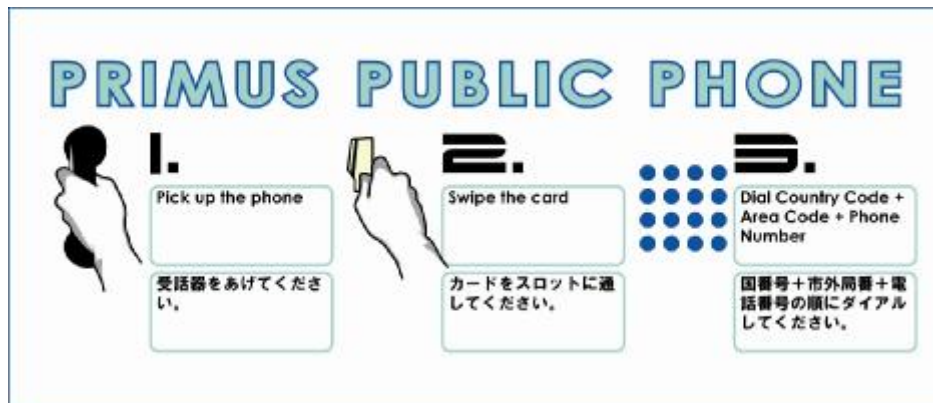

Instruction for using prepaid telephone cards:

1 Enter Free Dial

House **186-00531-020-0009***

Mobile **186-00531-00-1604***

Public **0037-80-3609***

Non Free 186-03-5325-6781*

2 Enter your Card ID No. + #:
0 0 0 0 0 0 0 0 0 0

3 To select language: (The language prompt is only given the first time.)
 ① English ② 日本語 ③ Arabic
 ④ French ⑤ Latin Spanish

4 Place a call:
Country Code + Area Code + Phone number + #
 or **9# for Option Menu**

Do not insert this card into pay phone card slots.

Notice:

- This card is for international calls only.
- When using public phones, insert coin or local telephone card first. (This is a toll free call).
- When using Primus Public Phone, just swipe the bar code and wait for dial tone.
- This card is not refundable / exchangeable for money.
- A lost card can not be reissued.
- Rates may change without prior notice.
- This card expires 3 months after first use.
- *For mobile toll free, you need KDDI international account.
- For making additional call, press #.

使用上のご注意:

- このカードは国外への電話専用です。
- 公衆電話をご利用の場合は、最初に硬貨またはテレホンカードをご使用ください。(フリーダイヤル)
- プライマス専用電話をお使いの場合は、バーコードをスロットに通して、ダイヤルトーンをお待ちください。
- このカードを紛失した場合の再発行、開封後のお取り替え、カードの換金は出来ません。
- 予告無しに価格が変動する場合があります。
- カードの有効期限はご利用開始から3ヶ月です。
- *携帯電話からのフリーダイヤルは、別途KDDIとの契約が必要です。
- 続けて通話を行う場合は#を2回(# #)押してください。

Customer Service:
03-5846-3754 Mon.-Fri. 9:00am - 6:00pm

Powered by PRIMUS

S.N. - 0000000

Free dialing numbers:

- A: Customers Service- 58463754
- B: Toll Free Provider- 005310200007
- C: Police - 110
- D: First Aid - 119

Setup:

1. For enter to SETUP MENU:
2. Pick the phone.
3. Push the PROGRAMMING button 2 sec. (The button located on the main circuit).
4. Display is showing:

IP-510	V3.0	02.01
Model	Version	Version Date

5. After display showing:

A0	ON
-----------	-----------

6. Press button D to next Menu. To previous Menu press button A.

SETUP MENU		
Channel	Display showing	Function
A	A0 ON	Channel A ON/OFF . Change with *
	A1 PERYPHON	Not used.
	A2 58463754 - - - - -	Customers Service Telephone No. of A Channel. * - Save.
	A3 Not used.	Not used.
	A4 Not used.	Not used.
	A5 Not used.	Not used.
Channel	Display showing	Function
B	B0 ON	Channel B ON/OFF . Change with *
	B1 PERYPHON	Not used.
	B2 005310200007 - - - - -	Toll Free Provider Telephone No. of B Channel. * - Save.
	B3 Not used.	Not used.
	B4 18	Time Delay, sec. Change with *
	B5 Not used.	Not used.
Channel	Display showing	Function
C	C0 ON	Channel C ON/OFF . Change with *
	C1 PERYPHON	Not used.
	C2 110 - - - - -	Police Service Telephone No. of C Channel. * - Save.
	C3 Not used.	Not used.
	C4 Not used.	Not used.
	C5 Not used.	Not used.
Channel	Display showing	Function
D	D0 ON	Channel D ON/OFF . Change with *
	D1 PERYPHON	Not used.
	D2 119 - - - - -	First Aid Service Telephone No. of D Channel. * - Save.
	D3 Not used.	Not used.
	D4 Not used.	Not used.
	D5 Not used.	Not used.

WARNING! When the display shows two stars, please change battery.

Installation instructions

8

1. Mark the location of the holes.
2. Bore 7mm holes and connect the phone to the wall by 25mm screws.
3. Pay attention to the recommended height of installation of the phone.
4. See that the telephone is properly levelled by using level device.
5. Install the telephone in supervised place and keep away from water sources.
6. Connect to standard Line socket.
7. Connect the battery (9V Alkaline only), Battery is not included.

TELEPHONE HIGHT FROM THE FLOOR UP TO THE UPPER HOLES MUST BE 1.4 M.

