


TA-1088/TP Military Phone

CB-LB Military Phone. MIL-STD 810E Compliant

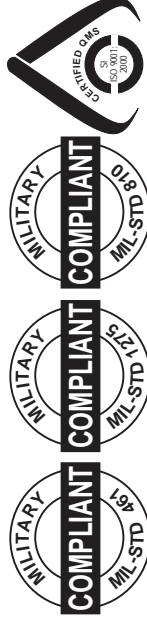

TA-1088

Product Description:

The TA-1088/TP Military Phone is a neatly styled lightweight.
2-wire local battery and central battery phone, 16 buttons DTMF/PULSE dialing on CB.

Technical Characteristics:

Voltage requirements :
LB 3.3 to 4.5 V dc, CB 24-60 V line, 20 to 60 mA.
Frequency range: 300-3400 Hz.
Signaling Electronic Generator:
25 or 50 Hz 45 to 80 V RMS 3W.
Phone to Phone (Station-to-Station) range: using wire WD-1/TT
(loop resistance is 46 ohm per 1000 feet)
at distances of over 79 km performance is reduced.
Warning LED for "Low Battery".
LED indicator, holding ring for 20 seconds, and outgoing warning ring.
Push button Electronic Signaling Generator.
DTMF/PULSE dialing with Redial and Flash button.
Piezo Ringer, adjustable.
Handset: H-189 with PTT switch.
Weight: Approx. 1.7 Kg excluding batteries.
Size: 240 x 95 x 110 mm.
Operation temp. -30 to +60 C.
Operates with AN/TT 25, 38, 39 and SB-3614 switches Center.
Ring back LED.
4.5 V from standard "C" size cells.

MIL-STD Compliant:

Temperature operation/storage - MIL-STD 810E Compliant
Vibration operation/storage - MIL-STD 810E Compliant
Humidity operation/storage - MIL-STD 810E Compliant

MIL-STD Connectors:

MIL-STD Compliant

All right reserved. 1995-2008 © Peryphon Ltd ®
10 Hamelacha St., block 209, New Industrial Park Rosh-Ha'ayin 48091 Israel
TEL: 972-3-9025682 FAX: 972-3-9025684 E-mail: peryphon@zahav.net.il

PERYPHON LTD

[http:// www.peryphon.co.il](http://www.peryphon.co.il)