


Military LAN Switch GS-108T

8 port 10/ 100/ 1000 MB Smart Gigabit lan switch. MIL-STD 461C-D-E/810E Compliant

GS-108T

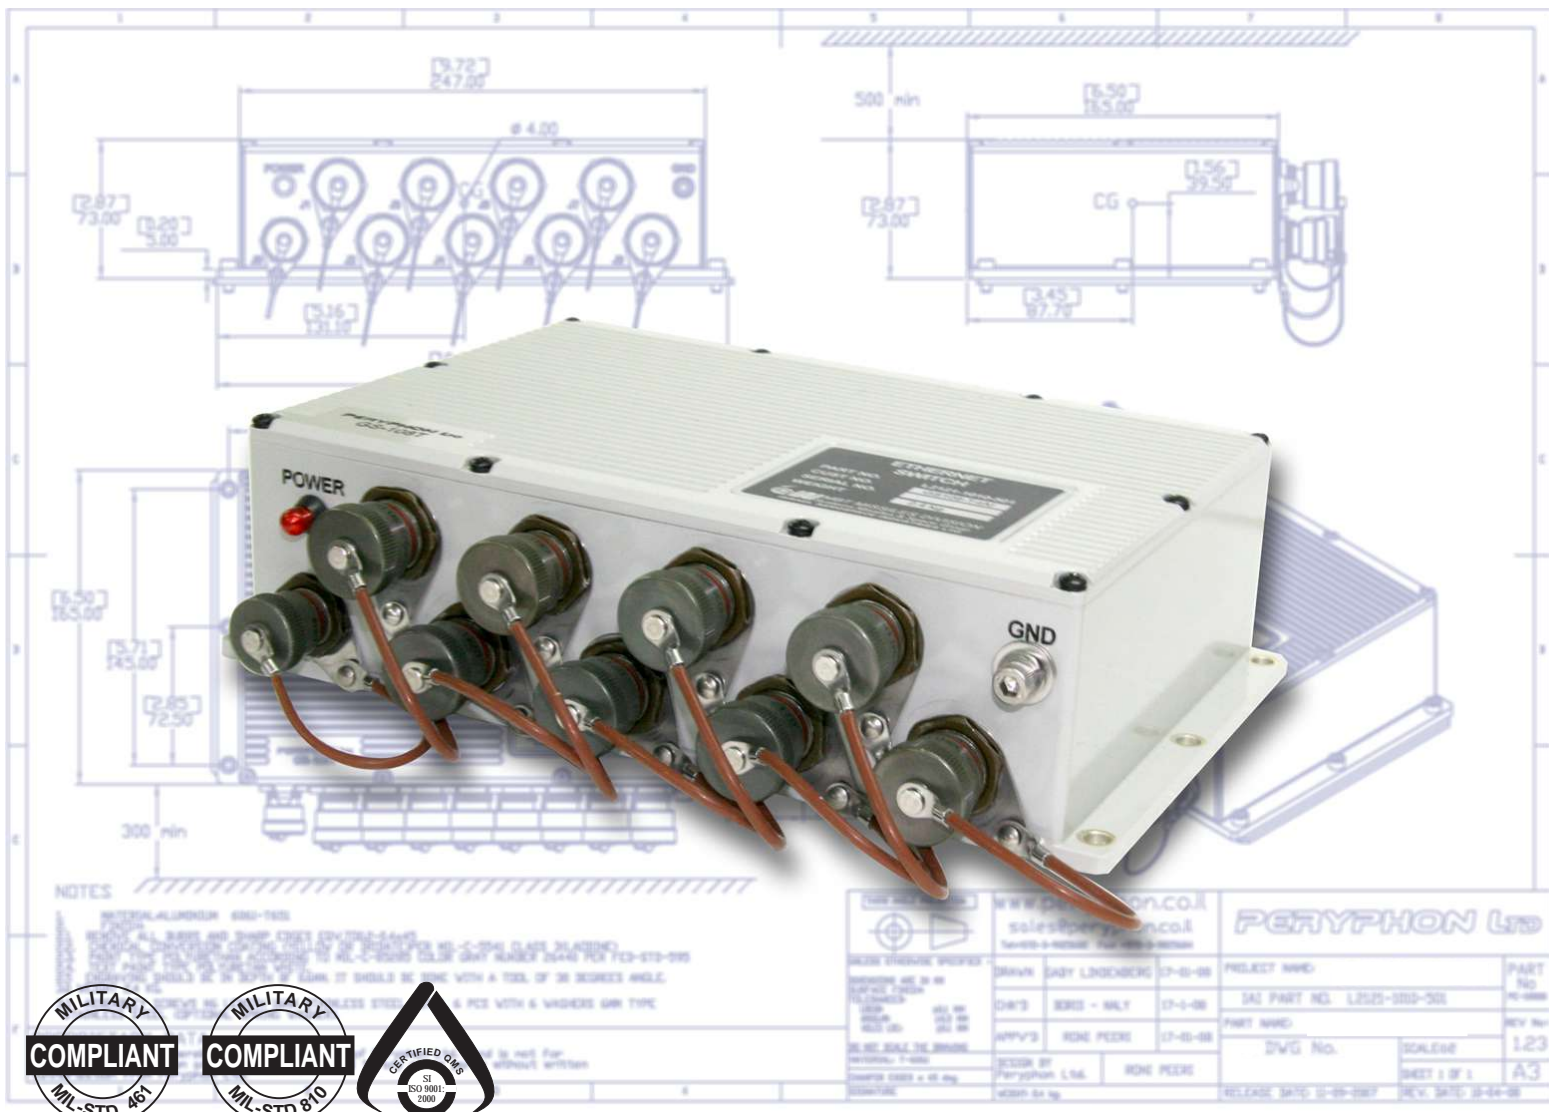

Product Description:

GS-108T is a smart high-performance managed Layer 2 switch, and is an important part in tactical communication system for use with ground, airborne and seaborne service. The GS-108T has (8) 10/100/1000 Mbps Fast Gigabit Ethernet ports.

Product Features:

- 16 Gbps Switching capacity
- Bandwidth Control down to 64k
- Auto Uplink™ technology
- Secure Management through SSH, SSL, TACACS+ Authentication, and RADIUS

Advanced Layer 2 Switching:

With a 16 Gbps switch Bandwidth (8 ports, 2000 Mbps/port to Full Duplex Mode), support for Private VLANs, Guest VLANs. By widely supporting IEEE approved specifications, the GS-108T leverages your existing investment in a multi-vendor environment, while maximizing compatibility of critical features like, Spanning Tree (802.1w), QoS (802.1p), Port mirroring, and network management. Support for standards based network management protocols enabling the GS-108T to be easily integrated into many thirdparty network management packages.

Advanced Enterprise Features:

QoS/CoS based on (802.1p, port, DSCP and TOS), rich security and management features such as 802.1x (Port & MAC Based Authentication), bandwidth control, and Guest VLANs. Supports many of the features you would expect to see on a larger managed solution such as: IGMP snooping, 802.3ad (Link Aggregation), 256 VLANs, Private VLANs, support for GVRP, traffic monitoring, SSH, SSL, SYSLOG, and more.

MIL-STD Compliant:

- Temperature operation/storage - MIL-STD 810E Compliant
- Vibration operation/storage - MIL-STD 810E Compliant
- Humidity operation/storage - MIL-STD 810E Compliant

Integrated power supply:

- Voltage operation - 18...32 VDC (24 V 0.35A) - MIL-STD Compliant

MIL-STD Connectors:

- LAN Connectors - MIL-STD Compliant D38999 III 24W35SN
- Power Connector - MIL-STD Compliant D38999 III 24W98PN

Physical and Environmental:

- Dimensions - 270 x 165 x 73 mm
- Weight - 2,4 kg
- Operation temperature range: -20 C ...+60 C



All right reserved. 1995-2008 © Peryphon Ltd ®
10 Hamelacha St., block 209, New Industrial Park Rosh-Ha'ayin 48091 Israel
TEL: 972-3-9025682 FAX: 972-3-9025684 E-mail: peryphon@zahav.net.il

PERYPHON LTD

[http:// www.peryphon.co.il](http://www.peryphon.co.il)